





- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel and is polyester plastic coated. Can be ordered uncoated or with coating that complies with the Environmental class M3/Corrosion class C4.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.


PRESSURE/FLOW

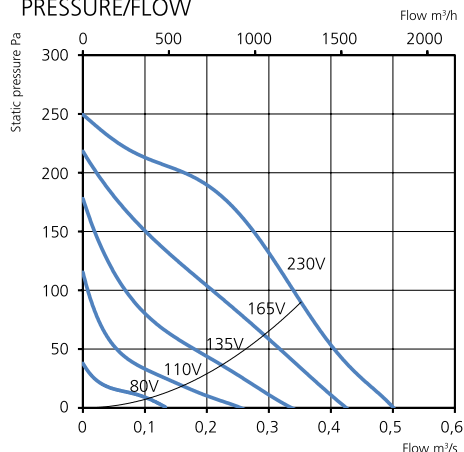

POWER/FLOW

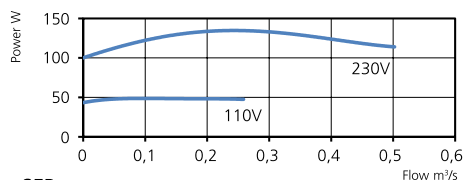

SFP

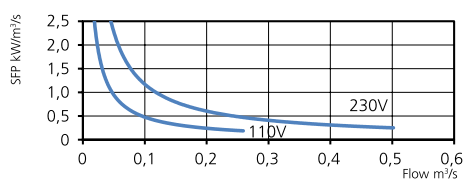

TECHNICAL DATA

Voltage	230 V
Frequency	50 Hz
Phase	1 ~
Current	0.61 A
Power	137 W
Speed	1250 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	61 dB(A)
Weight	19.9 kg
Enclosure class	44 IP
Wiring diagram	4040001

ACCESSORIES

- Roof curb TFU 560
- Connection plate TFU 560
- Back draught shutter TFU 560
- Transformer controller VRTE C
- Transformer controller VRDE 1.5
- Speed controller VRS 1.0

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 230 V	68	41	55	58	64	62	60	59	45
Inlet 230 V	68	58	61	62	62	56	58	59	44
Inlet 165 V	64	53	58	57	57	51	53	57	34
Inlet 135 V	60	52	52	52	51	46	52	53	26
Inlet 110 V	54	45	51	46	44	38	46	27	21
Inlet 80 V	43	34	40	38	32	28	23	20	20

Available in following design:

Black C4	7351080
Galvanized	7351060

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS

(mm)

