

NON INSULATED ROOF FAN WITH SQUARE CONNECTIONS

TKV 560 B3

7351071

- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer can be connected.
- Fan housing is manufactured from galvanized sheet steel and is polyester plastic coated. Can be ordered uncoated or with coating that complies with the Environmental class M3/Corrosion class C4.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.




ACCESSORIES

- Roof curb TFU 560
- Connection plate TFU 560
- Back draught shutter TFU 560
- Transformer controller VRTT 1
- Transformer controller VRDT 2


TECHNICAL DATA

Voltage	400 V
Frequency	50 Hz
Phase	3 ~
Current	0.46 A
Power	242 W
Speed	1330 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	65 dB(A)
Weight	26.3 kg
Enclosure class	54 IP
Wiring diagram	4040004


PRESSURE/FLOW

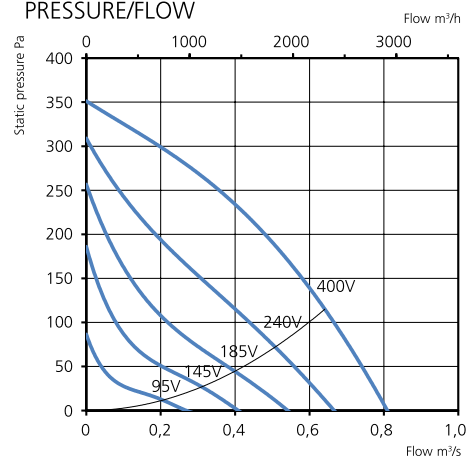

POWER/FLOW

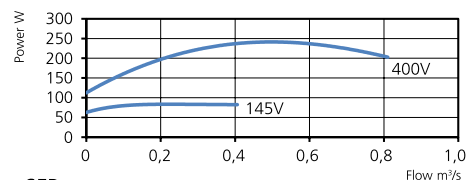

SFP

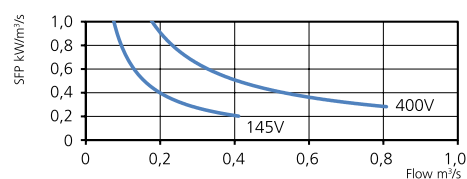

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 400 V	72	39	57	62	65	66	63	62	63
Inlet 400 V	73	54	64	66	67	62	61	62	68
Inlet 240 V	69	52	60	61	60	55	57	64	57
Inlet 185 V	64	52	53	55	54	50	53	61	38
Inlet 145 V	59	46	46	49	48	45	55	54	25
Inlet 95 V	45	35	34	35	35	39	41	17	15

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

Available in following design:

Black C4	7351081
Galvanized	7351061

DIMENSIONS

(mm)

