





- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer can be connected.
- Fan housing is manufactured from galvanized sheet steel and is polyester plastic coated. Can be ordered uncoated or with coating that complies with the Environmental class M3/Corrosion class C4.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.


### PRESSURE/FLOW

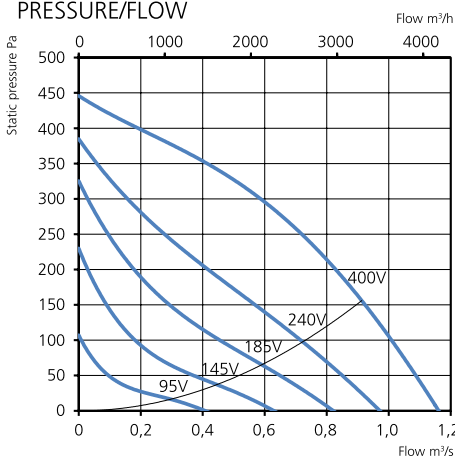

### POWER/FLOW

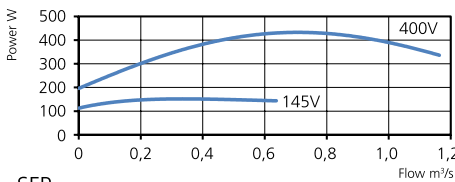

### SFP

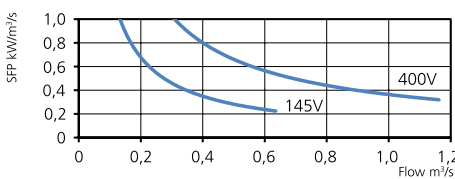

### TECHNICAL DATA

<b>Voltage</b>	400 V
<b>Frequency</b>	50 Hz
<b>Phase</b>	3 ~
<b>Current</b>	0.80 A
<b>Power</b>	435 W
<b>Speed</b>	1320 r.p.m.
<b>Max. temp of transported air</b>	60 °C
<b>Sound pressure level, 3 m</b>	66 dB(A)
<b>Weight</b>	28.1 kg
<b>Enclosure class</b>	54 IP
<b>Wiring diagram</b>	4040004

### SOUND DATA

	$L_{wa}$ tot dB (A)	63	125	250	500	1K	2K	4K	8K
<b>Surrounding 400 V</b>	73	40	59	65	67	66	64	60	64
<b>Inlet 400 V</b>	75	58	68	69	69	64	62	59	68
<b>Inlet 240 V</b>	70	55	65	64	63	57	58	55	62
<b>Inlet 185 V</b>	65	56	57	58	57	51	51	60	45
<b>Inlet 145 V</b>	60	49	49	52	50	47	44	57	29
<b>Inlet 95 V</b>	50	37	38	38	37	31	49	19	14

### Available in following design:

Black C4	7351083
Galvanized	7351063

### MORE INFORMATION



Find out the latest updated information about this product by visiting [www.ostberg.com](http://www.ostberg.com) or scanning this QR code.

ROOF FANS

### DIMENSIONS

( mm )

