

NON INSULATED ROOF FAN WITH SQUARE CONNECTIONS

TKV 660 B3

7351075

- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.

- For speed control a transformer can be connected.
- Fan housing is manufactured from galvanized sheet steel and is polyester plastic coated. Can be ordered uncoated or with coating that complies with the Environmental class M3/Corrosion class C4.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.



ACCESSORIES

- Roof curb TFU 660
- Connection plate TFU 660
- Back draught shutter TFU 660
- Transformer controller VRTT 4
- Transformer controller VRDT 4

TECHNICAL DATA

Voltage	400 V
Frequency	50 Hz (60 Hz)
Phase	3 ~
Current	1.58 A
Power	836 W
Speed	1430 r.p.m.
Max. temp of transported air	40 °C
Sound pressure level, 3 m	73 dB(A)
Weight	47.5 kg
Enclosure class	54 IP
Wiring diagram	4040004

SOUND DATA

	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 400 V	80	48	65	71	74	74	71	68	65
Inlet 400 V	81	64	71	74	76	73	70	68	69
Inlet 240 V	79	62	70	72	73	70	67	65	66
Inlet 185 V	74	59	66	69	69	65	62	62	62
Inlet 145 V	65	54	56	59	60	52	52	58	36
Inlet 95 V	58	48	47	49	55	41	52	27	17

MORE INFORMATION





Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

Available in following design:


Black C4	7351085
Galvanized	7351065

DIMENSIONS


(mm)

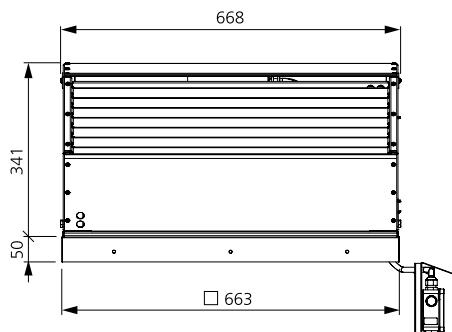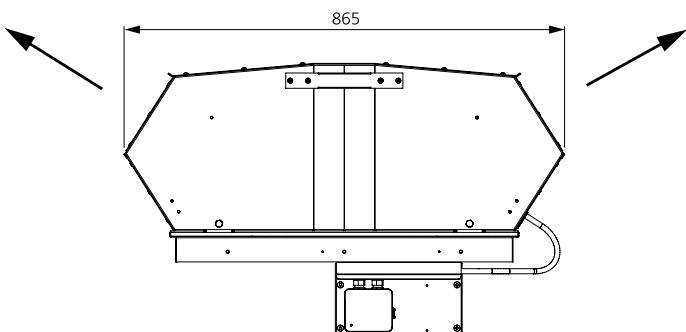

PRESSURE/FLOW

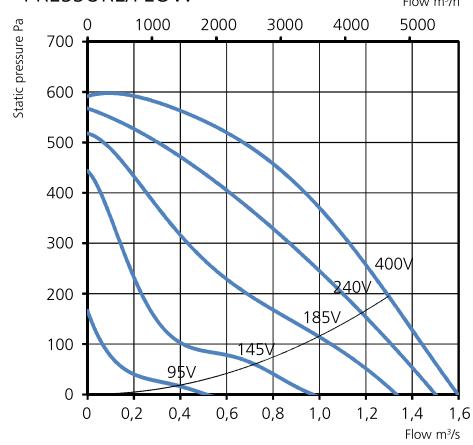

POWER/FLOW

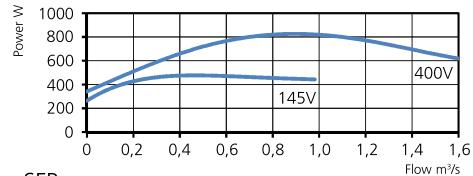

SFP

