

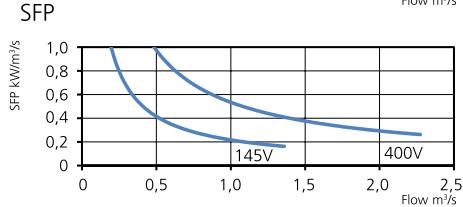


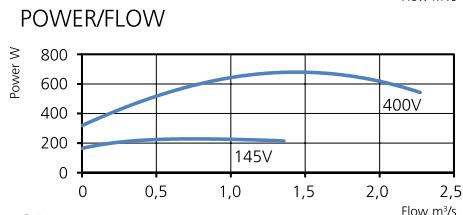

- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.

- For speed control a transformer can be connected.
- Fan housing is manufactured from galvanized sheet steel and is polyester plastic coated. Can be ordered uncoated or with coating that complies with the Environmental class M3/Corrosion class C4.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.

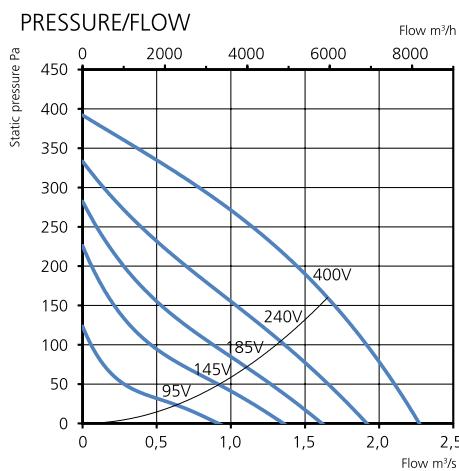

#### TECHNICAL DATA

Voltage	400 V
Frequency	50 Hz
Phase	3 ~
Current	1.5 A
Power	691 W
Speed	870 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	66 dB(A)
Weight	66.5 kg
Enclosure class	54 IP
Wiring diagram	4040004

#### SOUND DATA

	L <sub>WA</sub> tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 400 V	73	67	62	63	65	65	64	62	52
Inlet 400 V	78	68	73	70	68	67	66	67	61
Inlet 240 V	72	65	63	65	63	61	61	64	51
Inlet 185 V	68	62	58	60	57	56	57	62	44
Inlet 145 V	64	60	54	55	51	52	58	52	37
Inlet 95 V	56	41	42	42	42	46	55	29	21

#### Available in following design:

Black C4	7351087
Galvanized	7351067

#### ACCESSORIES

- Roof curb TFU 760
- Connection plate TFU 760
- Back draught shutter TFU 760
- Transformer controller VRTT 2
- Transformer controller VRDT 2

#### MORE INFORMATION



Find out the latest updated information about this product by visiting [www.ostberg.com](http://www.ostberg.com) or scanning this QR code.

#### DIMENSIONS

