

NON INSULATED ROOF FAN WITH SQUARE CONNECTIONS

TKV 760 C3

7351078

- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer can be connected.
- Fan housing is manufactured from galvanized sheet steel which is polyester plastic coated in black as standard.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.
- The fan complies with environmental requirement M2.




ACCESSORIES

- Roof curb TFU 760
- Connection plate TFU 760
- Back draught shutter TFU 760
- Transformer controller VRTT 4
- Transformer controller VRDT 4


TECHNICAL DATA

Voltage	400 V
Frequency	50 Hz (60 Hz)
Phase	3 ~
Current	2.7 A
Power	1210 W
Speed	1360 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	74 dB(A)
Weight	68.8 kg
Enclosure class	54 IP
Wiring diagram	4040004


PRESSURE/FLOW

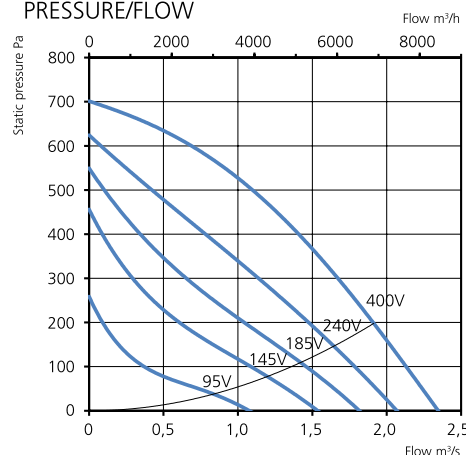

POWER/FLOW

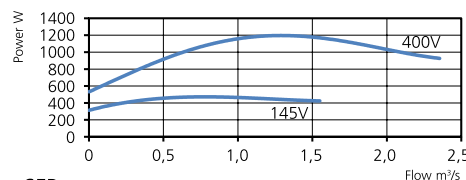

SFP

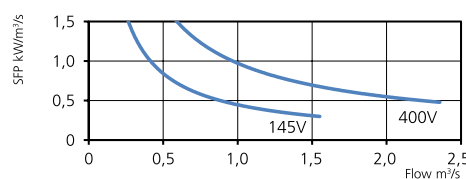

SOUND DATA

	L_{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 400 V	81	53	71	73	76	75	72	70	67
Inlet 400 V	83	63	72	75	76	73	73	73	75
Inlet 240 V	79	62	70	72	73	69	70	69	71
Inlet 185 V	76	60	69	69	69	66	67	68	66
Inlet 145 V	72	61	65	64	63	60	63	66	52
Inlet 95 V	65	56	54	55	54	53	58	60	39

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

Available in following design:

Black C4	7351088
Galvanized	7351068

DIMENSIONS

(mm)

