





- Roof fan with square connection.
- Vertical outlet.
- High performance and proven reliability.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer can be connected.
- Fan housing is manufactured from galvanized sheet steel which is polyester plastic coated in black as standard.
- Swing-up design to simplify maintenance and cleaning of the impeller.
- The easiest way to mount the roof fan is with a roof curb TFU.
- The fan complies with environmental requirement M2.


PRESSURE/FLOW

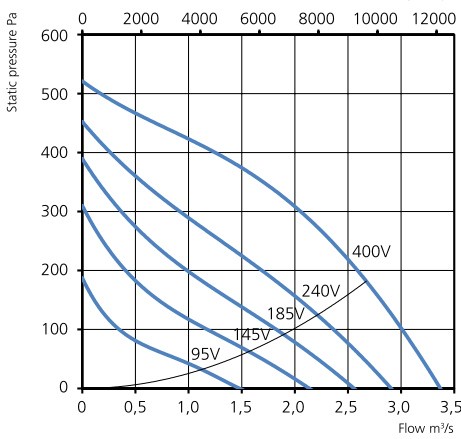

POWER/FLOW

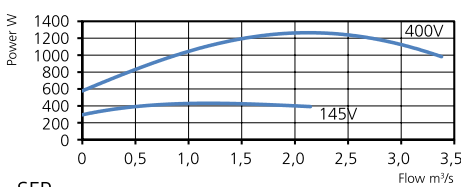

SFP

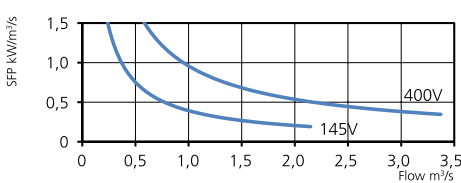

TECHNICAL DATA

Voltage	400 V
Frequency	50 Hz (60 Hz)
Phase	3 ~
Current	3.06 A
Power	1280 W
Speed	880 r.p.m.
Max. temp of transported air	60 °C
Sound pressure level, 3 m	83 dB(A)
Weight	102.6 kg
Enclosure class	54 IP
Wiring diagram	4040004

ACCESSORIES

- Roof curb TFU 960
- Connection plate TFU 960
- Back draught shutter TFU 960
- Transformer controller VRDT 4
- Transformer controller VRDT 4

SOUND DATA

	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
Surrounding 400 V	90	52	70	73	79	85	87	82	77
Inlet 400 V	80	66	73	73	73	71	68	61	71
Inlet 240 V	75	63	65	69	68	66	62	63	66
Inlet 185 V	72	61	61	65	64	61	57	66	54
Inlet 145 V	68	59	57	60	59	57	52	64	44
Inlet 95 V	62	46	49	52	49	46	59	51	29

Available in following design:

Black C4	7351089
Galvanized	7351069

MORE INFORMATION



Find out the latest updated information about this product by visiting www.ostberg.com or scanning this QR code.

DIMENSIONS

(mm)

